


2-Way ATCV on Return, 2.0" or smaller, Automatic Balanced, Strainer Supply, Components: ABe, SVe, UB & 2x FHT

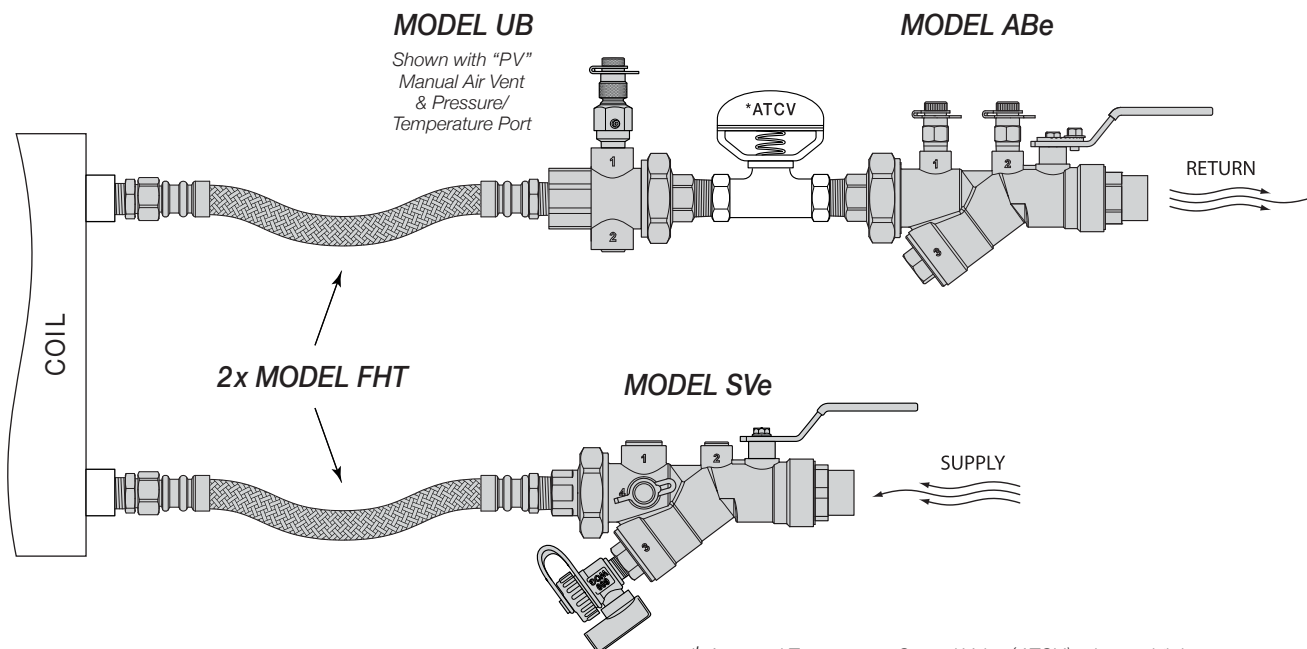

\* Actuated Temperature Control Valve (ATCV), pipe and fittings illustrated above are by others and not supplied.

## MODEL ABe

ABe Automatic Balancing Valve is a combination ball valve, automatic flow control device and union. The removable flow cartridge limits GPM to within  $\pm 5\%$  of specified flow. Fixed End connection available in FNPT or SWT. Tailpiece connection available in MNPT, FNPT or SWT. Size reductions available. Standard features include Adjustable Memory Stop and Dual Pressure/ Temperature Ports.

## MODEL SVe

SVe Combination Strainer Valve is a combination ball valve, wye strainer and union. The 20 mesh S/S strainer screen is removable for cleaning. Fixed End connection available in FNPT or SWT. Tailpiece connection available in MNPT, FNPT or SWT. Size reductions available. Standard features include Pressure/ Temperature Port, Hose End Drain Valve and plugged Bypass Port.

## MODEL UB

UB Union is an O-ring sealed union with two 0.25" plugged accessory ports. Fixed End Connections available in FNPT or SWT. Tailpiece Connections available in MNPT, FNPT or SWT. Size reductions available. Shown with "PV" Combination Manual Air Vent and Pressure/ Temperature Port.

## 2x MODEL FHT

FHT NuFlex Hose Assemblies offer double crimp Stainless Steel ferrules over Stainless Steel outer braiding and EPDM Rubber Liner. Flexible hoses feature MNPT brass end connections available in 18", 24" and 36" lengths.

QUANTITY	SIZE	GPM	TAG