


2-Way ATCV on Return, 2.5" or larger, Automatic Balanced, Strainer Supply, Components: AW & SW

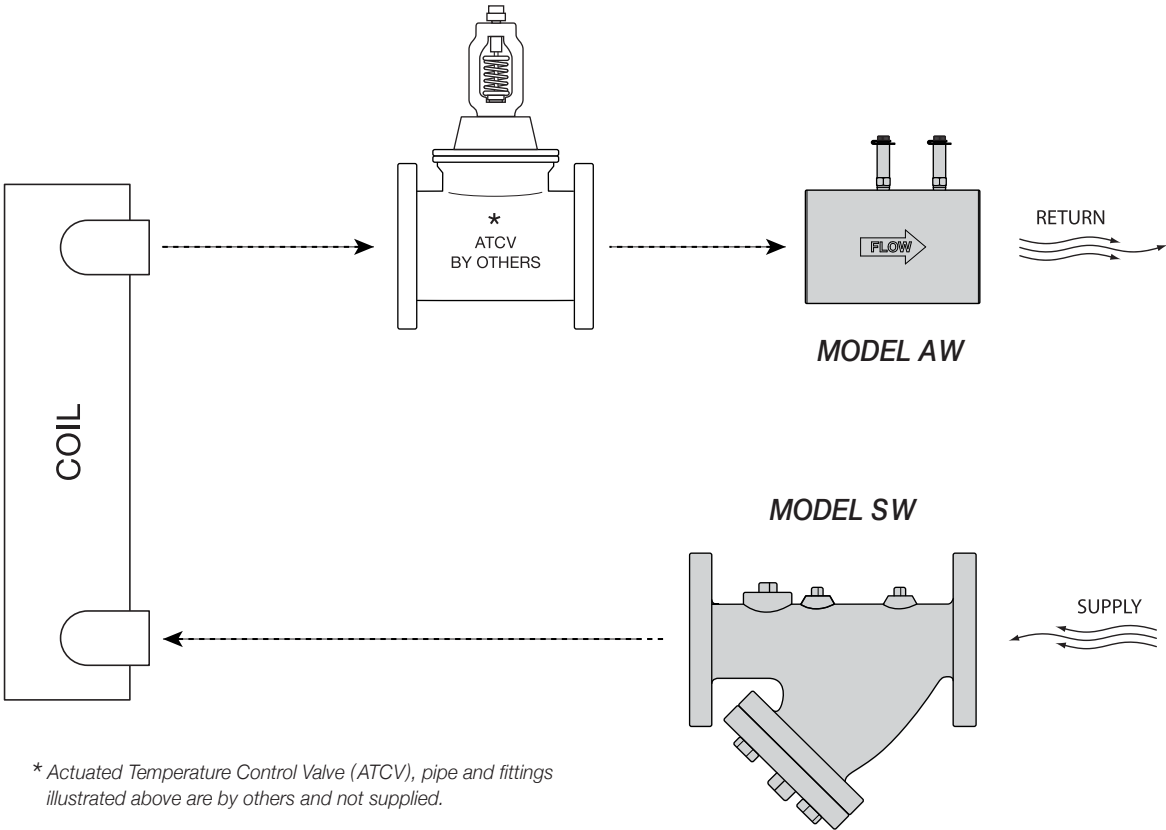

**MODEL AW**

AW Automatic Balancing Valve incorporates a wafer style ductile iron body. The removable flow cartridge(s) is factory set to automatically limit the GPM to within  $\pm 5\%$  of the specified flow. Shipped with Rods and Nuts for use with customer supplied companion flanges. Standard features include Dual Extended Pressure/Temperature Ports.

**MODEL SW**

SW Strainer is a "Y" (we) strainer with removable stainless steel strainer screen, bolted cover with blow down connection and ANSI 125# Flanged End Connections. Strainer body features three threaded Accessory Ports.

QUANTITY	SIZE	GPM	TAG