


2-Way ATCV on Return, 2.5" or larger, Automatic Balanced, Strainer Supply with Lug Type Butterfly Valve, Components: AF & SF

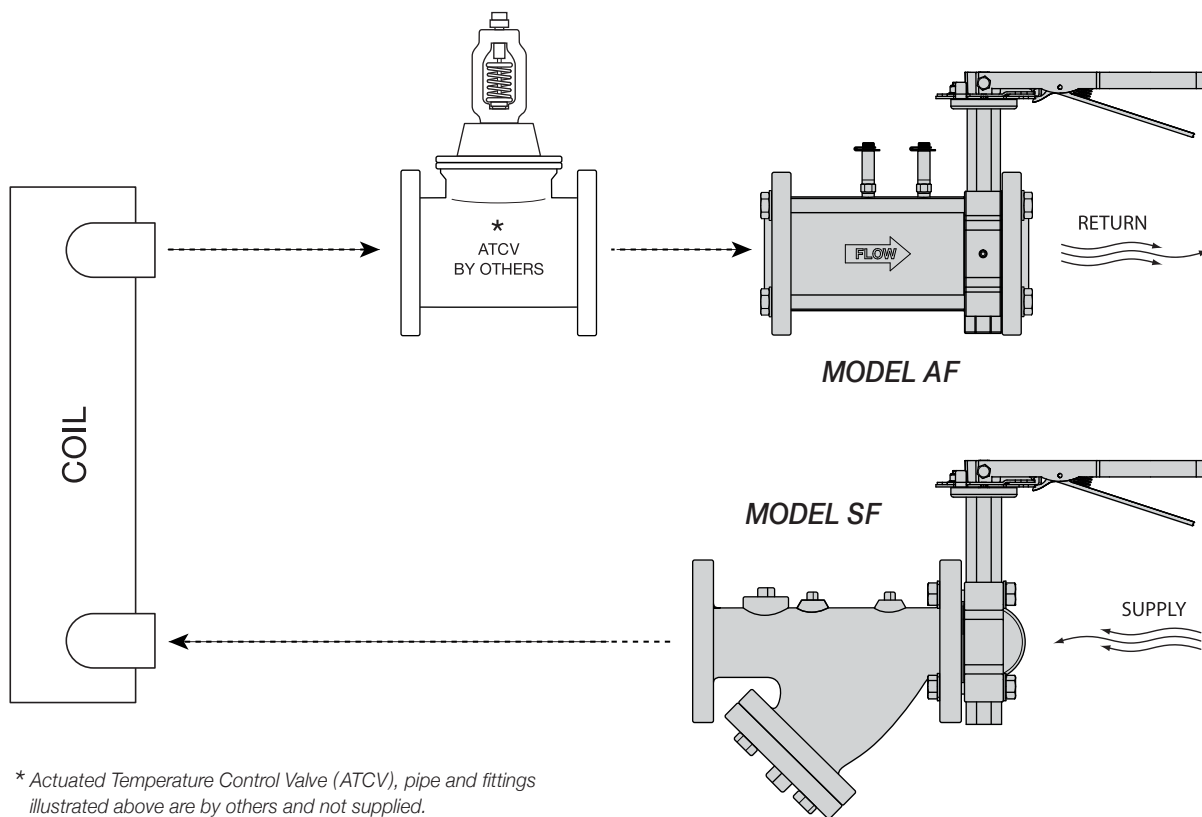

### MODEL AF

AF Automatic Balancing Valve incorporates a wafer style ductile iron body and lug type butterfly valve with adjustable flow positioning plate. The removable flow cartridge(s) is factory set to automatically limit the GPM to within  $\pm 5\%$  of the specified flow. Shipped with Rods and Nuts for use with customer supplied companion flange. Standard features include Dual Extended Pressure/ Temperature Ports.

### MODEL SF

SF Combination Strainer Valve is a "Y" (wye) strainer with removable stainless steel strainer screen, bolted cover with blow down connection and ANSI 125# Flanged End Connections. Mounted on the inlet is a ductile iron Lug Type Butterfly Valve. Strainer body features three threaded Accessory Ports.

QUANTITY	SIZE	GPM	TAG